



SmartKing™ standalone design code narrow wiegand EM & HID reader/keypad




CHARACTERISTICS

- Aluminum alloy structure, waterproof, fully potted, conform to IP65
- Standalone single door metal wiegand keypad/reader controller
- 2000 users
- Entry by card only and/or a 4-6 digits PIN code
- 1 master code, one manager add card, one manager delete card
- Built-in EM & HID (125KHz) card reader
- Programmable relay time: 1-99 sec or toggle mode
- Inputs for exit button, door status contact
- Alarm output, programmable time 0-3 minutes
- Programmable backlight: ON, OFF or automatic
- Programmable built-in buzzer
- Programmable Wiegand 26–37 bit output & multiple format keypad output
- Additional functions: keypad lockout, anti-duress card/PIN, anti-tamper, anti-passback, door bell
- Programmable PIN keypad output: 4Bit, 8Bit and PIN output

TECHNICAL SPECIFICATIONS

- Dimensions: 158,6 x 43 x 21,7 mm
- Outputs: relay COM/NO/NC and standard Wiegand 26 bit programmable 26–37 bit
- Card type : 125 KHz EM & HID
- Power supply: 12–14 VDC
- Stand-by current: ≤ 35 mA
- Response time: 0.1 second
- Reading range: 3–6 cm
- Anti-tamper: yes
- Key press output: 4 bit, 8 bit and virtual card number
- Protection: IP65
- Antistatic: 15 KV
- Operating temperature: -40°C ~ +60°C (-40°F ~ 140°F)
- Operating humidity: 0–95 %

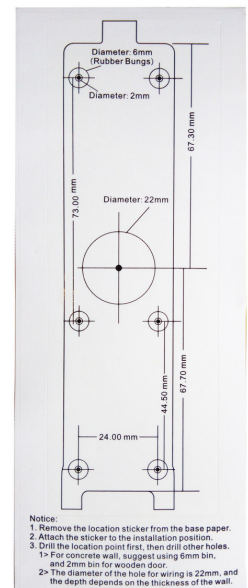

ORDER INFORMATION

- PA240319 - SmartKing™ standalone design code narrow wiegand EM & HID reader/keypad

